

# Bi2 smart

## SLR smart

**Total flat** fan coil radiator. No unsightly grill: total and perfect integration with the environment.



Bi2 is the winner of the GOOD DESIGN AWARD 2014. Founded in Chicago in 1950, GOOD DESIGN is the oldest and most acknowledged international competition for design excellence.




Design by S. Ercoli & A. Garlandini

### FEATURES


- Cools, Dehumidifies, Heats and Filters
- Terminal with integrated heating panel
- Compact: thickness of just 12,9 cm
- Range consists of 5 power models
- AC Motor
- Smart sides
- Total Flat Aesthetic with integrated vacuum system

installation:




Available in colors:  White

MODEL	cod.	Bi2 smart with heating panel (SLR smart)				
		SLR smart 200	SLR smart 400	SLR smart 600	SLR smart 800	SLR smart 1000
White color		01417	01418	01419	01420	01421

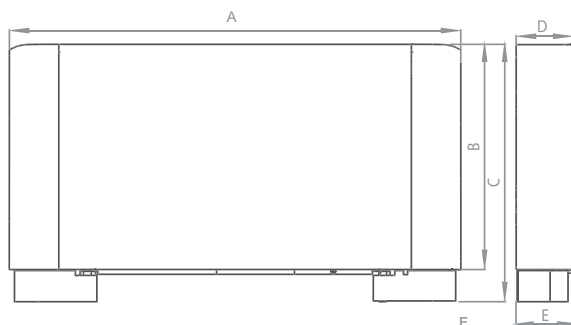

		200	400	600	800	1000
<b>A</b>	mm	759	959	1159	1359	1559
<b>B</b>	mm	579	579	579	579	579
<b>C</b>	mm	659	659	659	659	659
<b>D</b>	mm	129	129	129	129	129
<b>E</b>	mm	150	150	150	150	150
<b>Weight</b>	kg	13,5	15,5	19,5	22,5	25,5

- 1 Valve with thermoelectric actuator (accessory kit)
- 2 Tubular heating panel
- 3 High Efficiency Coil
- 4 Water temperature sensor
- 5 High efficiency tangential fan
- 6 Condensation collector basin
- 7 Electronic controls (accessory kit)

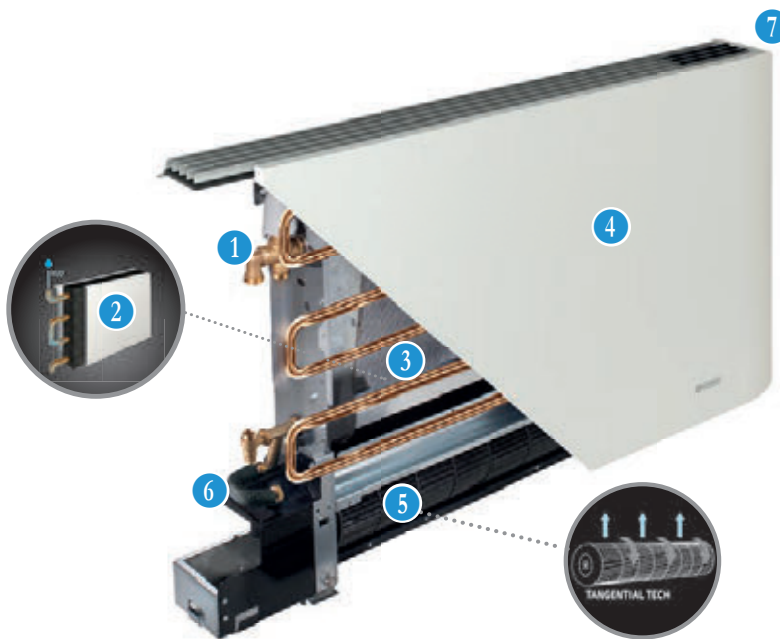

MODEL	Bi2 SLR smart					
		200	400	600	800	1000
(a) Total cooling capacity	kW	0,81	1,73	2,53	3,27	3,77
Sensible cooling capacity	kW	0,63	1,24	1,96	2,52	2,97
Water flow rate	lt/h	142	302	446	573	655
Water pressure loss	kPa	13,1	8,2	19	18,7	18,2
(b) Heating capacity (50°C)	kW	1,05	2,31	3,12	4,10	4,67
Water flow rate (50°C)	lt/h	84	185	249	329	374
Water pressure loss (50°C)	kPa	12,2	6,8	15,8	15,5	15,1
(c) Heating capacity (70°C)	kW	1,77	3,88	5,21	6,88	7,83
Water flow rate (70°C)	lt/h	152	334	448	592	673
Water pressure loss (70°C)	kPa	10,9	7,0	14,3	12,7	12,5
Battery water capacity	l	0,47	0,8	1,13	1,46	1,8
Maximum operating pressure	bar	10	10	10	10	10
Water connections	inches	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4	Eurocono 3/4	Eurocone 3/4
(d) Air flow min	m³/h	100	170	180	370	420
(d) Air flow max	m³/h	160	320	460	575	650
Absorbed power min	W	6	9	9	17	19
Absorbed power max	W	17	28	35	38	43
Sound power min Lw	dB(A)	38	39	41	39	42
Sound power max Lw	dB(A)	52	53	53	54	54
(g) Sound pressure	dB(A)	34	36	37	35	38
Electrical supply	V/ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Max capacity static heating (50°C)	kW	0,37	0,42	0,50	0,62	0,77
Max capacity static heating (70°C)	kW	0,59	0,71	0,84	1,04	1,28
Water content heating panel	l	0,3	0,5	0,6	0,7	0,9

Performance at maximum ventilation speed

(a) Water temperature in battery inlet 7°C, water temperature in battery outlet 12°C, ambient air temperature 27°C b.s. and 19°C b.u.

(b) Water temperature in battery inlet 50°C, water flow in cooling + panel, inlet ambient air temperature 20°C

(c) Water temperature in battery inlet 70°C, water temperature in battery outlet 60°C, ambient air temperature inlet 20°C

(d) Air flow measured with clean filters

(g) Sound pressure measured at 1,5 m

# ACCESSORIES SLR smart

	CODE	DESCRIPTION	COMPATIBILITY
COMANDI AUTONOMI	 B0659	<b>Built-in</b> electronic control kit. Control with adjustable thermostat, fan speed selection (summer, winter, automatic) and ventilation program (minimum, maximum, night, modulated) and minimum water sensor function. It has an inlet for the presence sensor connection, and two 230VAC outlets for the control of 2 valves.	
	 B0371	<b>Built-in</b> electronic control kit. Control with adjustable thermostat, fan speed selection (summer, winter, automatic) and ventilation program (minimum, maximum, night, modulated) and minimum water sensor function. It has an inlet for the presence sensor contact connection, a 230VAC outlet for the solenoid valve control, and contacts to enable the boiler or chiller.	
	 B0772	Touch design <b>built-in</b> control kit. Back-lit display with desired temperature visualization, real-touch switches, mode of operation and fan speed selection. Control with adjustable thermostat, fan speed selection (summer, winter, automatic) and ventilation program (minimum, maximum, night, modulated) and minimum water sensor function. It has an inlet for the presence sensor contact connection, a 230VAC outlet for the solenoid valve control. Remote control provided.	
COMANDI REMOTTI	 B0372	Electronic control kit <b>for remotization</b> . The main operating parameters, set point and ambient temperature are transmitted from the remote control B0736 to all connected fan coils on the network, enabling a seamless operation. It has a 230VAC outlet for the control of a solenoid valve, two clean contacts for the control of a chiller or a boiler, and a presence inlet.  Operation in MODBUSprotocol, RS485.	B0736   My Home by 
	 B0736	LCD <b>wall clock thermostat remote</b> control kit. Programmable wall LCD thermostat control for MODBUS connection, RS485. Ability to control up to 30 units. Desired temperature selection, operation mode, fan speed, manual/programmable thermostat. Room sensor inserted in control. Backlit LCD. Presence contact input. The control is equipped with a 230/12VAC double insulation power transformer and a buffer battery. Wall installation with center to center distance compatible with standard recessed mounting box 503.	B0372 

	CODE	DESCRIPTION
HYDRAULIC KITS	 B0139 B0832	<b>2 way group valves with thermoelectric actuator kit.</b> <b>2-way valves unit kit with 4-wire thermoelectric actuator and end run micro switch.</b> Consists of a valve with thermoelectric actuator and holder, the first allows for the control of terminal thermal emissions intercepting water passage; the holder allows the balancing of system load losses. This kit is mandatory in version SLR except in the case of using a 3-way valve kit or in the presence of a collector with thermoelectric heads.
	 B0641 B0833	<b>2-way valves group kit with thermoelectric actuator and bypass branch with pressure relief valve.</b> <b>2-way valves unit kit with 4-wire thermoelectric actuator and end run micro switch and by-pass branch with pressure-relief valve.</b> The kit consists of a valve with thermoelectric actuator, a holder and a bypass with a pressure relief valve, the first allows the control of terminal thermal emissions intercepting water passage; the holder allows the balancing of system load losses while the by-pass maintains the system balanced even with cabinet excluded. This kit is an alternative to the 2-way solenoid valve kit. (Required in SLR version)
	 B0635 B0834	<b>3-way group valves kit with thermoelectric actuator.</b> <b>3-way valves unit kit with 4-wire thermoelectric actuator and end run micro switch.</b> Consists of a three-way diverter valve with thermoelectric actuator, and a holder. The first allows the control of terminal thermal emissions intercepting water passage; the holder allows the balancing of system load losses; the by-pass keeps water circulating in the system. This kit is an alternative to the 2-way solenoid valve kit (required in version SLR).
		<b>The valve unit kits with thermoelectric actuator are recommended for the following command kits to activate chiller and boiler: B0659 - B0673 - B0707 - B0774 - B0772 - B0828 - B0756</b>
	 B0205	<b>Manual 2-way group valves kit.</b> Consisting of a valve and a holder, the first allows the cabinet to be manually excluded from the system, while the holder allows the balancing of system load losses. Also allowed when solenoid valves on the collector are managed by the control kit of terminal Bi2.
	 B0204	<b>Manual 2-way valve isolation kit.</b> Avoids condensation during the cooling operation (already included in the other thermoelectric hydraulic kits).
	 B0501	<b>Spacer kit (No. 1 unit) 3/4 Eurokonus.</b> Available for multilayer pipes d. 20 mm. (which do not allow adequate bending radii), no. 1 or 2 kit. for machine according to the type of installation.
	 B0200 B0201	<b>Adaptors couple kit.</b> Allows you to transform the Bi2 3/4 " Eurocone connection into a standard 1/2 "(B0200) or 3/4 " (B0201) gas thread connection.
	 B0203	<b>kit 90° Eurokonus bend.</b> Facilitates the connection in case of hydraulic connections with walled pipes
	ELECTRICAL KITS	 B0459
AESTHETICAL KITS	 B0682	<b>Feet kit for smart Bi2.</b> Kit of two aesthetic feet for coverage of any floor pipes. Available in white.
	 B0683	<b>Floor fixing bracket kit Bi2 smart.</b> Kit support brackets and mounting the floor of the terminal (applications front windows or on non-bearing walls). It also has the function of aesthetic kit (color off white).
	 B0677 (200) B0678 (400) B0679 (600) B0680 (800) B0681 (1000)	<b>Back panel in painted sheet (For front glass applications).</b>